

WHAT'S NEW

20 PARAMETERS
+ 3 HISTOGRAMS

1 COUNTING CHANNELS

COMPACT AND RELIABLE




Features

- 20 parameters + 3 histograms
- 3-part differentiation of WBC
- 2 Counting mode : whole blood and prediluted
- Throughput : up to 30 samples per hour
- 8.0" TFT color LCD with mouse and keyboard operation
- Built-in thermal paper, optional external printer
- Easy Windows Operation Systems
- External AC adapter avoids electronic noises, enhancing accuracy.
- Up to 30000 sample results (including histograms) can be stored
- Original factory's reagents, blood control and calibrator

WP-330

Automated Hematology Analyzer

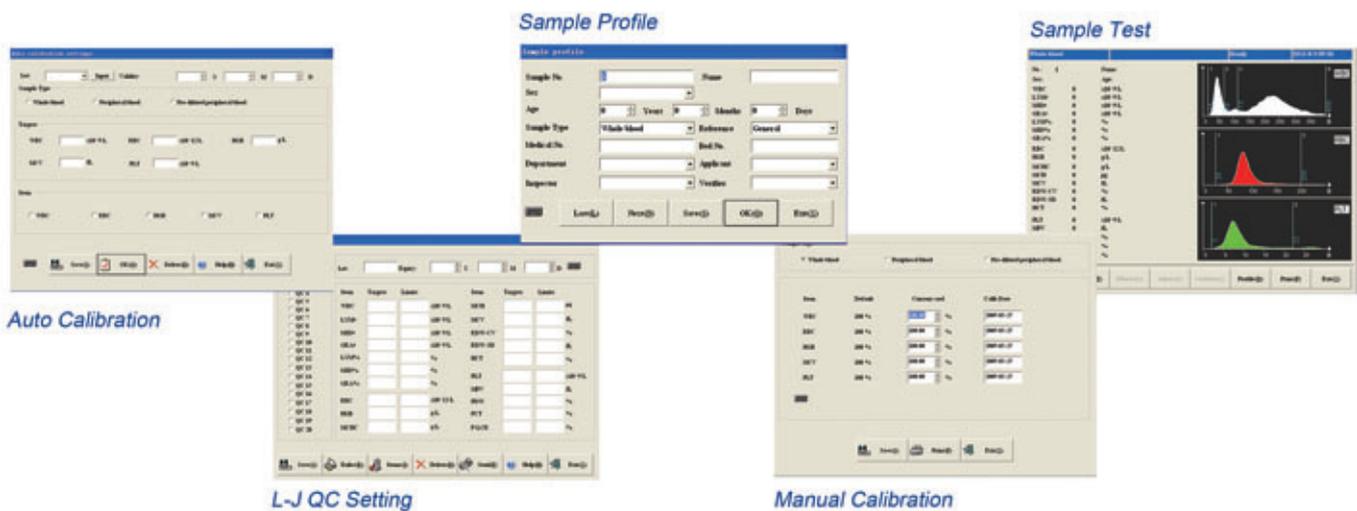

Technical Specifications

Parameters	WBC, LYM#, MON#, GRA#, LYM%, MON%, GRA%, RBC, HGB, MCHC, MCH, MCV, HCT, RDW-CV, RDW-SD, PLT, MPV, PDW, PCT, P-LCR and Histograms for WBC, RBC and PLT
Principle	Electrical resistance for counting WBC, RBC and PLT
Sample Volume	Prediluted: 20µL; Whole Blood: 9.8µL
Throughput	Up to 30 samples per hour
Display	8.0" TFT color LCD with mouse operation
Alarms	Error messages
Input/Output	RS-232, USB, LAN, keyboard and mouse interface
Printout	Thermal recorder, 55mm width paper, various printout formats, external printer optional
Operating Environment	Temperature: 15°C~35°C; Humidity: ≤80%
Power Requirement	a.c. 100-240V, 50-60±1Hz
Dimension	L×W×H(mm): 468×325×395
Weight	16.5Kg



Original Reagents, Controls & Calibrators



get the **Guaranteed Satisfaction** from us